

RADIO CONTROLLED HOOK SYSTEM

2 VERSIONS
AVAILABLE:
2T & 5,3T
working load




LUDWIGHOOK

VERSATILITY



LOAD
ATTACHED
DIRECTLY
TO HOOK

LOAD
ATTACHED
BY SLING

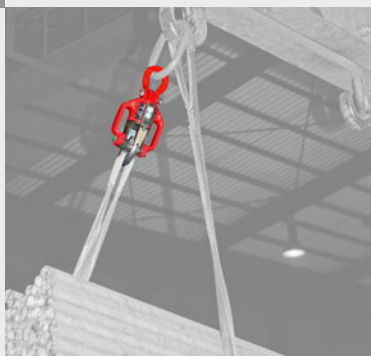

LOAD
STRUNG
BY SLING

RELEASABLE
PER RADIO



PERFORMANCE

EFFICIENCY

More lifting operations in time

SAFETY

Reduce risk exposure
when releasing load



LUDWIGHOOK



LUDWIGHOOK^{XL}



DETACH
LOADS
FROM SAFE
DISTANCE

SYSTEM

LUDWIGHOOK

LUDWIGHOOK^{XL}



RADIO CONTROL



CHARGING UNIT
OPTIONAL: MOBILE CHARGING



BELT
FOR RADIO CONTROL



TRANSPORT CASE

FOR YOUR SAFETY:
LOADS CAN BE
DETACHED ONLY
WHEN FULLY
DISCHARGED

TECHNICAL DATA

LUDWIGHOOK

LUDWIGHOOK^{XL}

WORKING LOAD

2,0 T

5,3 T

PRODUCT WEIGHT

2,8 KG

6,8 KG

DIMENSIONS IN MM (H x W x D)

120 · 199 · 102

249 · 154 · 179

RADIO RANGE

50 M

50 M

RADIO FREQUENCY

868 MHZ

868 MHZ

VOLTAGE

6 V

6 V

**STURDY
HANDY
MULTI-PURPOSE**

CONTACT



LUDWIGSYSTEM

GmbH & Co KG

Australian Distributor

ROBORIGGER INTERNATIONAL PTY LTD

49 Distinction Road, Wangara 6065 WA

+61 8 9488 4500

busdev@roborigger.com.au

www.roborigger.com.au

www.ludwigsystem.com